

ProJoint™ PORCELAIN™ Primer

Application instructions and technical overview

preparation is designed to be applied to the underside of porcelain paving and other low absorption substrates to promote adhesion. The underside of the paving should be clean, dry and free of any material which may impair adhesion - do not apply to shiny surfaces. Do not use in wet weather and do not use if frost is forecast within 24 hours of application. Suitable for use in temperatures between 3°C and 25°C.

Ask about the ProJoint™ range of application tools


ProJoint™ Porcelain™ Primer should be mixed with 2.8 litres of cold clean water per 10kg bag. Remove the bag from the bucket and add the water to the mixing container. Add the powder slowly and mix using a plasterers' whisk. Mix for 2 minutes, leave standing for 2 minutes then re-mix - this process allows the polymer additives to dissolve and activate.



application

Apply a thorough and even coat of the primer as a slurry using a masonry brush or roller to the underside of the paving. The pot life of the mixed slurry is approximately 60 minutes at 20°C. **The primer should be completely dry prior to laying the paving.** Depending on temperature and moisture, primer will be dry within 10 to 15 minutes however the paving can be laid up to 24 hours after application.

All tools should be washed out with water immediately after use. Waste material should not be emptied into drainage systems.

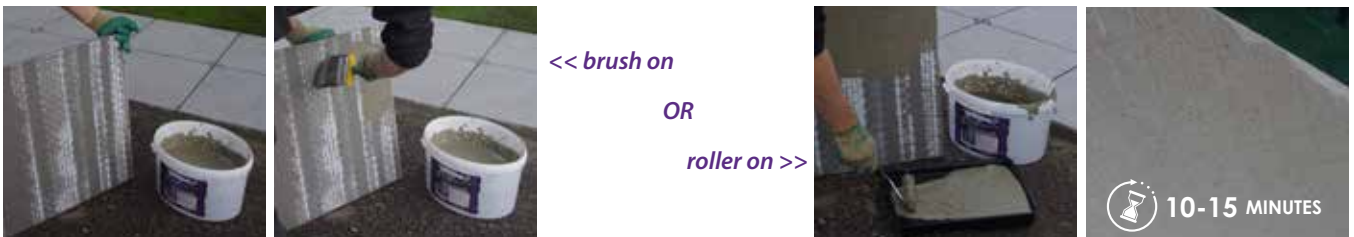

coverage

Approximate coverage per 20kg tub is 21.5m² depending on the application method and paving porosity.

See the online ProJoint™ consumption calculator for estimating projects.

ONLINE
PROJOINT™
CONSUMPTION
CALCULATOR



storage

When stored unopened in a dry place above 5°C, shelf life is 12 months from date of manufacture.

For health and safety information - a full datasheet is available on request.

Order Code:	Item Description:	Colour:	Pack Size:	Pallet Qty:
PP20	Porcelain Primer	n/a	20kg	50